

PARABOLA XP 2.5-2.7 GHz – 29.5 dBi

The PARABOLA XP parabolic antenna is a very high gain antenna, designed for building radio bridges at long distance. The very best materials selected and special tests executed by our company provide stable technical parameters independent from temperature or weather and durable co-operation with other radio devices. The antenna has an excellent mounting system, which enables precise adjustment both in horizontal and vertical planes.



Installation:


1. Mount the antenna to the mast using the enclosed handle.
 2. Set the antenna onto the second antenna to make the connection link.
 3. Connect the antenna's N-connector with the low-loss cable (H155, H1000).
- (We recommend using the angular N-connectors to prevent the connector from pulling out from the antenna).
5. Protect the connection spot with a thermo-shrinkable screen or wax.

Technical specification:

Gain	29.5 dBi
Frequency	2485-2690 MHz
Vertical beam width	5 degrees
Horizontal beam width	6 degrees
Impedance	50 Ohm
VSWR	1.4
Connector	N(m) plug
Dimensions	Diameter – 1200 mm
Weight	12.1 kg
Backward radiation	-
Polarization	Vertical or horizontal
Standard	Full compatibility with IEEE 802.11x
Mounting	Mast handle, diameter from 1/2 to 7/4 inch (allows full rotation).

Polarization:

Horizontal polarization

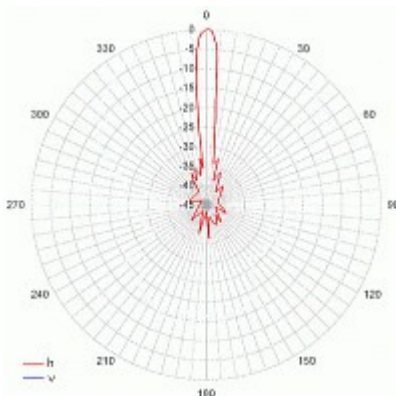

Vertical polarization

